


Premier LVDX200T & LVCF20

Safety Extra Low Voltage centrifugal extract and condensation control fans




The Safety Extra Low Voltage (SELV) versions of the Premier DX200 and CF20 pressure developing centrifugal fans are ideal for use in shower rooms, bathrooms with showers and other zone 1 and zone 2 wet areas. The SELV system consists of a 12V fan unit which can be safely installed in the spray area of a bath or shower, with the transformer located outside the spray area. Premier SELV fans have the same clean and sleek styling as the rest of the Premier range, with a white gloss body and fascia. They are designed for easy installation in walls, ceilings, windows or ducted installation at any angle and can be surface or recess mounted.

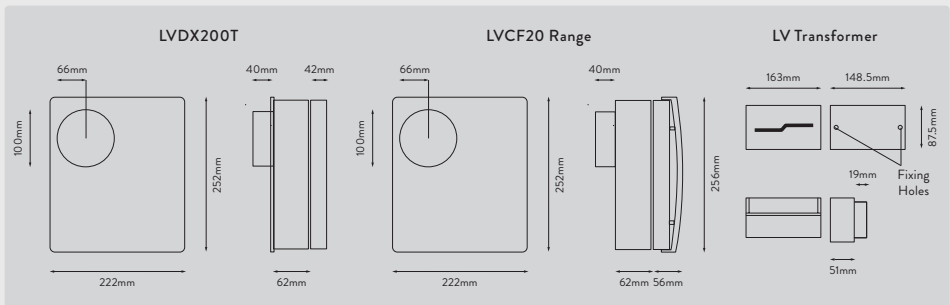



Product Features	LVDX200T	LVCF20	LVCF20T
Reference Number	91040AW	91041AW	91042AW
Condensation Control		✓	✓
Timer (30s - 30mins)	✓		✓
Pullcord (manual override)		✓	✓
Humidistat (50 - 90% RH)		✓	✓
SELV Transformer	✓	✓	✓
Quick Visit Timer Delay	✓		✓
Room Size Selector		✓	✓
Automatic Air Operated Backdraught Shutter	✓	✓	✓
External Grille Included		✓	✓

Product Selector		LVDX200T	LVCF20	LVCF20T
Reference Number		91040AW	91041AW	91042AW
Speeds		2	4	4
Trickle Ventilation Facility			✓	✓
Electrical Power Rating (W)		17/22	10/17/22/28	10/17/22/28
Boost Ventilation Facility			✓	✓
IP Rating		IPX5	IPX5	IPX5
UK Guarantee (years)				
		2	2	2
Extract Performance (fid, m³/h)	speed 3	•	91	91
	speed 2	99	75	75
	speed 1	52	52	52
	trickle	•	33	33
Extract Performance (fid, l/s)	speed 3	•	26	26
	speed 2	26	21	21
	speed 1	15	15	15
	trickle	•	10	10
Sound Pressure (dBA@3m)	speed 3	•	39.2	39.2
	speed 2	41.8	35.5	35.5
	speed 1	29.4	29.4	29.4
	trickle	•	21.7	21.7




Wall Mounting

Hole diameter: 115mm
Ducting size: 100mm




Ceiling Mounting

Hole diameter: 115mm
Ducting size: 100mm



Ducted Applications



Ventilation Shaft Mounting

Hole diameter: 115mm
Ducting size: 100mm